

Designed for offshore topside use in Ex Zone 2

Description:

easy to operate.

The device is made to shut down the pneumatic air pressure if the electrical power shut down.

The device also functions as an electrical power cable. Equipped with pneumatic inlet & outlet, grounding cable, power cable and electrical plug and socket.

The device has a design which is quick and

Specification:

Pneumatic quick connections: Hansen series 5000

Pneumatic pressure: 0-10 bar

Electrical power consumptions: 50W

Grounding cable: 5 meters Power cable: 35m 3x16A

Dimensions WxDxH: 515x515x1200mm


Weight: 45Kg

Material frame: AISI 316

Certified lifting eye: WLL 0,4 t

According to: Norsok Z-015 & Ex Zone 2

Depro drawing: DEP-GA-0389

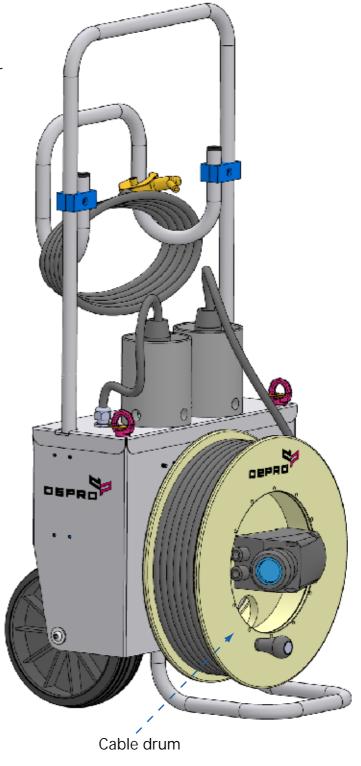

Consider it done

DK1118 www.depro.no