


Designed for use subsea, and operated with ROV.

Description:

Depro's 100mm (3 inch) stab connector is designed for 690 bars pressure and high flow. Double J-lock system gives a flexible, safe and quick connections point. The pressure drop is below 6 bars with 4000l/m.

Specification:

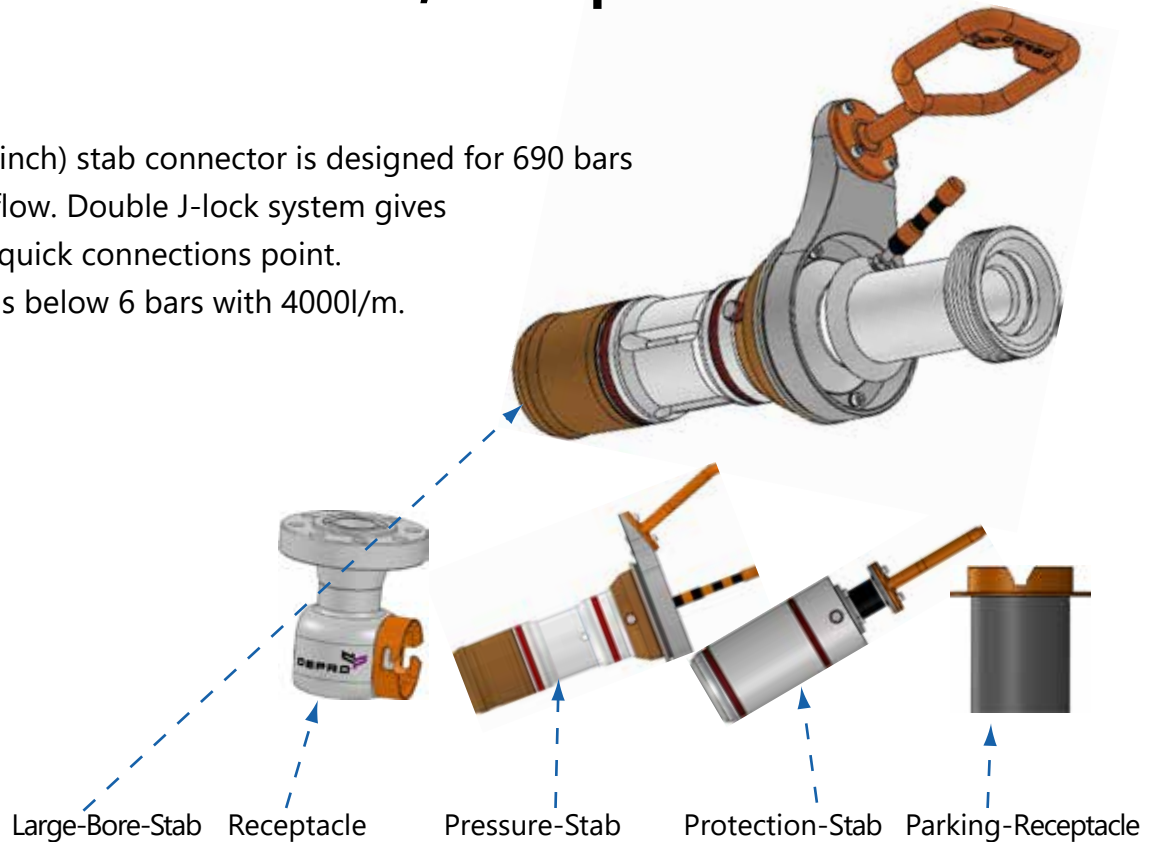

	Large-Bore-Stab	Receptacle	Pressure-Stab	Protection-Stab	Parking-Receptacle
Depro drawing:	DEP-GA-0337	DEP-GA-0336	DEP-GA-0338	DEP-GA-0452	DEP-GA-0453
Diameter stab:	99,8mm	N/A	99,8mm	99,8mm	N/A
Max pressure:	450 bar	450 bar	450 bar	0 bar	0 bar
Connection:	2" - 1502	API 6A 6BX	N/A	N/A	N/A
Temperatur Min/max:	-20 - 50 dgC	-20 - 50 dgC	-20 - 50 dgC	0 - 50 dgC	0 - 50 dgC
Material body:	1.4410-SuperDuplex			POM	POM
Seal material:	PUR/NBR70	N/A	PUR/NBR70	N/A	N/A
Max water dept:	3000 msw	3000 msw	3000 msw	3000 msw	3000 msw
Weight in air:	22 Kg	47 Kg	23 Kg	4 Kg	4 Kg
Dimensions LxØ (Body):	266x69,8mm	266x69,8mm	266x69,8mm	266x69,8mm	166x165mm

Different configuration and setup available based on fluid, flow, working pressure, and interface (flow connections).